






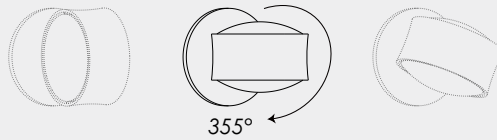


Lens

-  Wall luminaires
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  Ø 75 mm
-  0°~355°
-  White (WH)
-  Chrome (CH)



Wall direct / indirect luminaires

Wattage	Beam Angle	2700K	3000K	4000K	2700~6500K
Max. 2*12W	 Up80°Down40°	05.7501.WH 05.7501.CH	05.7502.WH 05.7502.CH	05.7503.WH 05.7503.CH	05.7504.WH 05.7504.CH

Dimming: On/Off, 1-10V, DALI, TRIAC
 UGR: ≤15
 SDCM: ≤3
 Luminous efficacy: 85lm/W
 luminaire Lifetime: 50000h (L80B50, T a25° C)
 Material: Aluminium
 Working Temperature (°C): -20° C ~ +45° C
 Transformer availability: LED DC 36V 2*200mA

