

Optical Kit  
Fixed / Adjustable

Mounting Accessories  
Trim / Trimless

# Cabin



# 7

Cut Dimension  
Ø70 mm / Ø120 mm

The natural evolution from the Light Shadow Dots. They offer extremely high effectiveness despite their small size and compact body.

# Combine and change your colour in a few seconds

Decorative ring finishes



CABIN

Matte gold



Matte copper



Matte Silver



Matte White



Matte Black



# CABIN SERIES

*The reflector can be selected in 5 colors to meet the needs of different occasions. It has undergone precise design, adopts electroplating and nano spray painting technology for high reflection efficiency, and provides a comfortable light type with high efficiency.*








# CABIN


## INSTALLATION INSTRUCTIONS

01

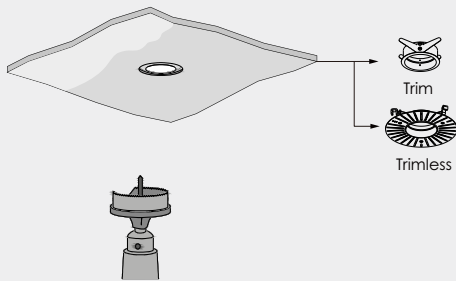

Ceiling cut inner hole  $\Phi$  120mm, and out hole  $\Phi$  150mm, depth 5mm.


02

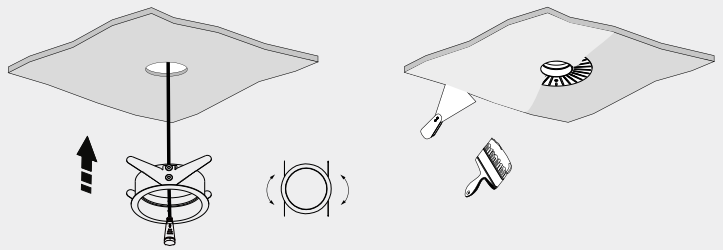

Trim:  
Compress spring plates to insert fixture frame to ceiling.

Trimless:  
The frameless embedded parts are fixed to the ceiling with screws. Plaster up the ceiling to hide brackets and screws.


04

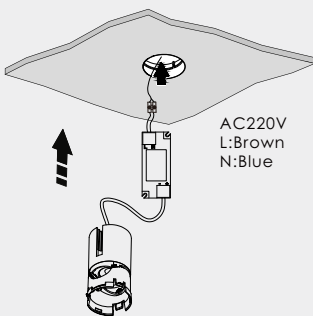


Install the lamp body part into the face frame and put it in place.

03




 Take out the reflective front cover before installing the lamp body!

05

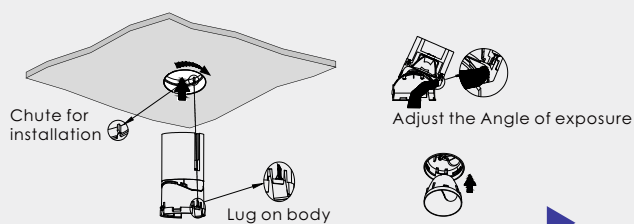
















After the body is stuck along the chute, turn clockwise.

03













Assembly complete.


# CABIN FAMILY

CABIN series ceiling recessed							
<b>adjustable</b>	<p>Trim recess opening: Ø70</p> 						
	<p>Trimless recess opening: Ø120</p> 						
<b>accessory</b>	 <p>Matte Gold (92.6301.MG)</p>	 <p>Matte Copper (92.6301.MC)</p>	 <p>Matte Silver (92.6301.MS)</p>	 <p>Matte White (92.6301.MW)</p>	 <p>Matte Black (92.6301.MB)</p>	 <p>Trim Accessories (90.2701.WH)</p>	 <p>Trimless Accessories (91.2701.WH)</p>

# Cabin

Adjustable trim Downlight

-  Ceiling recessed
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  Ø 70 mm
-  0°~30°
-  0°~355°
-  Matte White (MW)
-  Matte Black (MB)
-  Matte Silver (MS)
-  Matte Copper (MC)
-  Matte Gold (MG)



Wattage	Beam Angle	2700K	3000K	3500K	4000K
Max. 10W	13°	02.7001.MW	02.7002.MW	02.7003.MW	02.7004.MW
		02.7001.MB	02.7002.MB	02.7003.MB	02.7004.MB
		02.7001.MS	02.7002.MS	02.7003.MS	02.7004.MS
		02.7001.MC	02.7002.MC	02.7003.MC	02.7004.MC
		02.7001.MG	02.7002.MG	02.7003.MG	02.7004.MG
	24°	02.7005.MW	02.7006.MW	02.7007.MW	02.7008.MW
		02.7005.MB	02.7006.MB	02.7007.MB	02.7008.MB
		02.7005.MS	02.7006.MS	02.7007.MS	02.7008.MS
		02.7005.MC	02.7006.MC	02.7007.MC	02.7008.MC
		02.7005.MG	02.7006.MG	02.7007.MG	02.7008.MG
	38°	02.7009.MW	02.7010.MW	02.7011.MW	02.7012.MW
		02.7009.MB	02.7010.MB	02.7011.MB	02.7012.MB
		02.7009.MS	02.7010.MS	02.7011.MS	02.7012.MS
		02.7009.MC	02.7010.MC	02.7011.MC	02.7012.MC
		02.7009.MG	02.7010.MG	02.7011.MG	02.7012.MG
	50°	02.7013.MW	02.7014.MW	02.7015.MW	02.7016.MW
		02.7013.MB	02.7014.MB	02.7015.MB	02.7016.MB
		02.7013.MS	02.7014.MS	02.7015.MS	02.7016.MS
		02.7013.MC	02.7014.MC	02.7015.MC	02.7016.MC
		02.7013.MG	02.7014.MG	02.7015.MG	02.7016.MG


Dimming: On/Off, 1-10V, DALI, TRIAC  
 UGR: ≤8  
 SDCM: ≤3  
 Luminous efficacy: 78lm/W  
 luminaire Lifetime: 50000h ( L80B50, T a25° C )  
 Material: Aluminium  
 Working Temperature ( °C): -20° C ~ +45° C  
 Transformer availability: LED DC 36V 250mA






# Cabin

Adjustable trimless Downlight

-  Ceiling recessed
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  Ø 120 mm
-  0°~30°
-  0°~355°
-  Matte White (MW)
-  Matte Black (MB)
-  Matte Silver (MS)
-  Matte Copper (MC)
-  Matte Gold (MG)

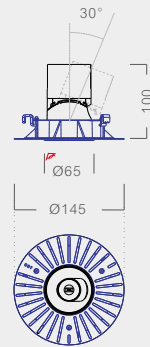

Wattage	Beam Angle	2700K	3000K	3500K	4000K
Max. 10W	13°	11.7001.MW	11.7002.MW	11.7003.MW	11.7004.MW
		11.7001.MB	11.7002.MB	11.7003.MB	11.7004.MB
		11.7001.MS	11.7002.MS	11.7003.MS	11.7004.MS
		11.7001.MC	11.7002.MC	11.7003.MC	11.7004.MC
		11.7001.MG	11.7002.MG	11.7003.MG	11.7004.MG
	24°	11.7005.MW	11.7006.MW	11.7007.MW	11.7008.MW
		11.7005.MB	11.7006.MB	11.7007.MB	11.7008.MB
		11.7005.MS	11.7006.MS	11.7007.MS	11.7008.MS
		11.7005.MC	11.7006.MC	11.7007.MC	11.7008.MC
		11.7005.MG	11.7006.MG	11.7007.MG	11.7008.MG
	38°	11.7009.MW	11.7010.MW	11.7011.MW	11.7012.MW
		11.7009.MB	11.7010.MB	11.7011.MB	11.7012.MB
		11.7009.MS	11.7010.MS	11.7011.MS	11.7012.MS
		11.7009.MC	11.7010.MC	11.7011.MC	11.7012.MC
		11.7009.MG	11.7010.MG	11.7011.MG	11.7012.MG
	50°	11.7013.MW	11.7014.MW	11.7015.MW	11.7016.MW
		11.7013.MB	11.7014.MB	11.7015.MB	11.7016.MB
		11.7013.MS	11.7014.MS	11.7015.MS	11.7016.MS
		11.7013.MC	11.7014.MC	11.7015.MC	11.7016.MC
		11.7013.MG	11.7014.MG	11.7015.MG	11.7016.MG


Dimming: On/Off, 1-10V, DALI, TRIAC  
 UGR: ≤8  
 SDCM: ≤3  
 Luminous efficacy: 78lm/W  
 luminaire Lifetime: 50000h ( L80B50, T a25° C )  
 Material: Aluminium  
 Working Temperature ( °C): -20° C ~ +45° C  
 Transformer availability: LED DC 36V 250mA





# Cabin

Adjustable trim Downlight

-  Ceiling recessed
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  Ø 70 mm
-  0°~30°
-  0°~355°
-  Matte White (MW)
-  Matte Black (MB)
-  Matte Silver (MS)
-  Matte Copper (MC)
-  Matte Gold (MG)











Wattage	Beam Angle	2700K	3000K	3500K	4000K
Max. 13W	13°	02.7017.MW	02.7018.MW	02.7019.MW	02.7020.MW
		02.7017.MB	02.7018.MB	02.7019.MB	02.7020.MB
		02.7017.MS	02.7018.MS	02.7019.MS	02.7020.MS
		02.7017.MC	02.7018.MC	02.7019.MC	02.7020.MC
		02.7017.MG	02.7018.MG	02.7019.MG	02.7020.MG
	24°	02.7021.MW	02.7022.MW	02.7023.MW	02.7024.MW
		02.7021.MB	02.7022.MB	02.7023.MB	02.7024.MB
		02.7021.MS	02.7022.MS	02.7023.MS	02.7024.MS
		02.7021.MC	02.7022.MC	02.7023.MC	02.7024.MC
		02.7021.SG	02.7022.MG	02.7023.MG	02.7024.MG
	38°	02.7025.MW	02.7026.MW	02.7027.MW	02.7028.MW
		02.7025.MB	02.7026.MB	02.7027.MB	02.7028.MB
		02.7025.MS	02.7026.MS	02.7027.MS	02.7028.MS
		02.7025.MC	02.7026.MC	02.7027.MC	02.7028.MC
		02.7025.MG	02.7026.MG	02.7027.MG	02.7028.MG
	50°	02.7029.MW	02.7030.MW	02.7031.MW	02.7032.MW
		02.7029.MB	02.7030.MB	02.7031.MB	02.7032.MB
		02.7029.MS	02.7030.MS	02.7031.MS	02.7032.MS
		02.7029.MC	02.7030.MC	02.7031.MC	02.7032.MC
		02.7029.MG	02.7030.MG	02.7031.MG	02.7032.MG


Dimming: On/Off, 1-10V, DALI, TRIAC  
 UGR: ≤8  
 SDCM: ≤3  
 Luminous efficacy: 78lm/W  
 luminaire Lifetime: 50000h ( L80B50, T a25° C )  
 Material: Aluminium  
 Working Temperature ( °C): -20° C ~ +45° C  
 Transformer availability: LED DC 36V 350mA



# Cabin

Adjustable trimless Downlight

-  Ceiling recessed
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  Ø 120 mm
-  0°~30°
-  0°~355°
-  Matte White (MW)
-  Matte Black (MB)
-  Matte Silver (MS)
-  Matte Copper (MC)
-  Matte Gold (MG)

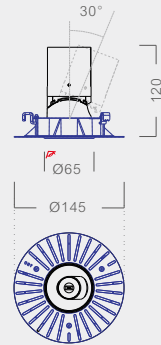

Wattage	Beam Angle	2700K	3000K	3500K	4000K
Max. 13W	13°	11.7017.MW	11.7018.MW	11.7019.MW	11.7020.MW
		11.7017.MB	11.7018.MB	11.7019.MB	11.7020.MB
		11.7017.MS	11.7018.MS	11.7019.MS	11.7020.MS
		11.7017.MC	11.7018.MC	11.7019.MC	11.7020.MC
		11.7017.MG	11.7018.MG	11.7019.MG	11.7020.MG
	24°	11.7021.MW	11.7022.MW	11.7023.MW	11.7024.MW
		11.7021.MB	11.7022.MB	11.7023.MB	11.7024.MB
		11.7021.MS	11.7022.MS	11.7023.MS	11.7024.MS
		11.7021.MC	11.7022.MC	11.7023.MC	11.7024.MC
		11.7021.MG	11.7022.MG	11.7023.MG	11.7024.MG
	38°	11.7025.MW	11.7026.MW	11.7027.MW	11.7028.MW
		11.7025.MB	11.7026.MB	11.7027.MB	11.7028.MB
		11.7025.MS	11.7026.MS	11.7027.MS	11.7028.MS
		11.7025.MC	11.7026.MC	11.7027.MC	11.7028.MC
		11.7025.MG	11.7026.MG	11.7027.MG	11.7028.MG
	50°	11.7029.MW	11.7030.MW	11.7031.MW	11.7032.MW
		11.7029.MB	11.7030.MB	11.7031.MB	11.7032.MB
		11.7029.MS	11.7030.MS	11.7031.MS	11.7032.MS
		11.7029.MC	11.7030.MC	11.7031.MC	11.7032.MC
		11.7029.MG	11.7030.MG	11.7031.MG	11.7032.MG

Dimming: On/Off, 1-10V, DALI, TRIAC  
 UGR: ≤8  
 SDCM: ≤3  
 Luminous efficacy: 78lm/W  
 luminaire Lifetime: 50000h ( L80B50, T a25° C )  
 Material: Aluminium  
 Working Temperature ( °C ): -20° C ~ +45° C  
 Transformer availability: LED DC 36V 350mA





## OBT LIGHTING LIMITED

Unit G1 Capital House 61  
Amhurst Road, London,  
United Kingdom, E8 1LL  
services@obtlighting.cn  
Hotline : 400 090 2289

[www.obt.ltd](http://www.obt.ltd)



Floor 2, No. 979, Yunhan  
Road, Lingang New District,  
China (Shanghai) pilot Free  
Trade Zone  
services@obtlighting.cn  
Hotline : 400 090 2289

[www.obt.ltd](http://www.obt.ltd)

Office 5, 8/F, Mega Cube,  
8 Wang Kwong Road, Kowloon  
Bay, Kowloon, Hong Kong  
services@obtlighting.cn  
Hotline : 400 090 2289

[www.obt.ltd](http://www.obt.ltd)