

A minimalist interior space with a large arched window, wooden chairs, and a small tree. The room is brightly lit, with a clean, white aesthetic. The floor is a light-colored, speckled material. The walls are white, and the ceiling is also white. The overall atmosphere is serene and modern.


**Dover is a luminaire designed at its core for wall washing applications. A minimalistic and tight design adds aesthetical dimensions to any project and enables installations close to the illuminated target.**

**DOVER**



# Light where it is meant to be


*DOVER Series are OBT's answer for indoor linear light options with IP Rating of IP20. It has been designed for facade and similar applications. It come with various lengths, 25mm,50mm, 300mm, 600mm, 900mm and 1200mm and beam angles 25x45°, which will meet wide range of application requirements.*

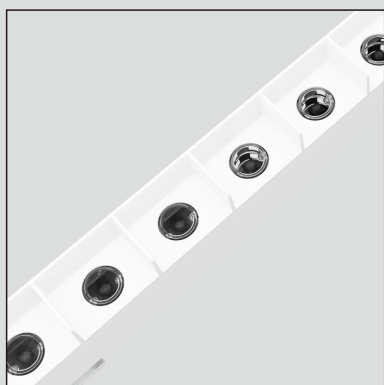

*Enable a precise cut off and perfect homogeneity*






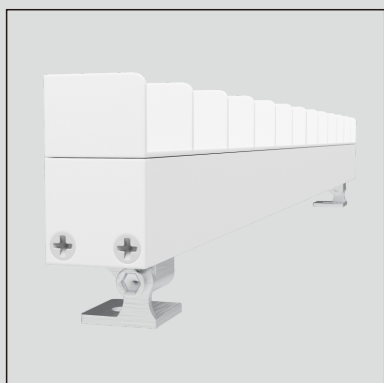



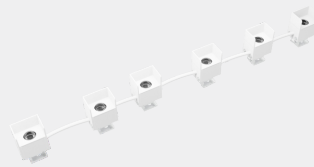
*Outstanding CRI up to 90 and low glare.*



*Minimally invasive (only 16 mm) and possibility to install close to the target.*

# Dover

-  Ceiling wallwasher
-  DC 24V
-  Ra 95
-  Lens
-  Class II
-  White (WH)










Wattage	Beam Angle	3000K	3500K	4000K
Max. 6W	 25°*45°	55.1701.WH	55.1702.WH	55.1703.WH

Dimming: On/Off, 1-10V, DALI  
 UGR: ≤16  
 SDCM: ≤3  
 Luminous efficacy: 85lm/W  
 luminaire Lifetime: 50000h ( L80B50, T a25° C )  
 Material: Aluminium  
 Working Temperature ( °C): -20° C ~ +45° C  
 Transformer availability: LED DC 24V constant current drive



# Dover

-  Ceiling wallwasher
-  DC 24V
-  Ra 95
-  Lens
-  Class II
-  White (WH)











Wattage	Beam Angle	3000K	3500K	4000K
Max. 12W	 25°*45°	55.1704.WH	55.1705.WH	55.1706.WH

Dimming: On/Off, 1-10V, DALI  
 UGR: ≤16  
 SDCM: ≤3  
 Luminous efficacy: 85lm/W  
 luminaire Lifetime: 50000h ( L80B50, T a25° C )  
 Material: Aluminium  
 Working Temperature ( °C): -20° C ~ +45° C  
 Transformer availability: LED DC 24V constant current drive



# Dover

-  Ceiling wallwasher
-  DC 24V
-  Ra 95
-  Lens
-  Class II
-  White (WH)










Wattage	Beam Angle	3000K	3500K	4000K
Max. 24W	 25°*45°	55.1707.WH	55.1708.WH	55.1709.WH


Dimming: On/Off, 1-10V, DALI  
 UGR: ≤16  
 SDCM: ≤3  
 Luminous efficacy: 85lm/W  
 luminaire Lifetime: 50000h ( L80B50, T a25° C )  
 Material: Aluminium  
 Working Temperature ( °C): -20° C ~ +45° C  
 Transformer availability: LED DC 24V constant current drive



# Dover

-  Ceiling wallwasher
-  DC 24V
-  Ra 95
-  Lens
-  Class II
-  White (WH)










Wattage	Beam Angle	3000K	3500K	4000K
Max. 36W	 25°*45°	55.1710.WH	55.1711.WH	55.1712.WH

Dimming: On/Off, 1-10V, DALI  
 UGR: ≤16  
 SDCM: ≤3  
 Luminous efficacy: 85lm/W  
 luminaire Lifetime: 50000h ( L80B50, T a25° C )  
 Material: Aluminium  
 Working Temperature ( °C): -20° C ~ +45° C  
 Transformer availability: LED DC 24V constant current drive



# Dover

-  Ceiling wallwasher
-  DC 24V
-  Ra 95
-  Lens
-  Class II
-  White (WH)



Wattage	Beam Angle	3000K	3500K	4000K
Max. 48W	 25°*45°	55.1713.WH	55.1714.WH	55.1715.WH

Dimming: On/Off, 1-10V, DALI  
 UGR: ≤16  
 SDCM: ≤3  
 Luminous efficacy: 85lm/W  
 luminaire Lifetime: 50000h ( L80B50, T a25° C )  
 Material: Aluminium  
 Working Temperature ( °C): -20° C ~ +45° C  
 Transformer availability: LED DC 24V constant current drive







## OBT LIGHTING LIMITED

Unit G1 Capital House 61  
Amhurst Road, London,  
United Kingdom, E8 1LL  
services@obtlighting.cn  
Hotline : 400 090 2289

[www.obt.ltd](http://www.obt.ltd)



Floor 2, No. 979, Yunhan  
Road, Lingang New District,  
China (Shanghai) pilot Free  
Trade Zone  
services@obtlighting.cn  
Hotline : 400 090 2289

[www.obt.ltd](http://www.obt.ltd)

Office 5, 8/F, Mega Cube,  
8 Wang Kwong Road, Kowloon  
Bay, Kowloon, Hong Kong  
services@obtlighting.cn  
Hotline : 400 090 2289

[www.obt.ltd](http://www.obt.ltd)