

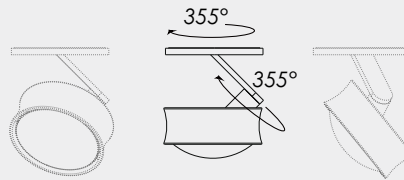




Lens

-  Ceiling luminaires
-  AC 220V~240V
-  Ra 95
-  Lens
-  Class II
-  Ø 50 mm
-  0°~90°
-  0°~355°
-  White (WH)
-  Chrome (CH)



Adjustable Surface Mounted Downlight

Wattage	Beam Angle	2700K	3000K	4000K	2700~6500K
Max. 20W	 40°	52.5007.WH 52.5007.CH	52.5008.WH 52.5008.CH	52.5009.WH 52.5009.CH	52.5015.WH 52.5015.CH
	 80°	52.5010.WH 52.5010.CH	52.5011.WH 52.5011.CH	52.5012.WH 52.5012.CH	52.5016.WH 52.5016.CH

Dimming: On/Off, 1-10V, DALI, TRIAC
 UGR: ≤15
 SDCM: ≤3
 Luminous efficacy: 85lm/W
 luminaire Lifetime: 50000h (L80B50, T a25° C)
 Material: Aluminium
 Working Temperature (°C): -20° C ~ +45° C
 Transformer availability: LED DC 36V 500mA

